



Z10

Adventure junkies, here's your perfect 10. The ZFORCE Z10 and Z10-4 feature a turbocharged triple-cylinder engine, cutting-edge electronics, FOX QSE shocks with Eibach springs, and a premium sport interior. It's a 143 HP, high-performance beast at an unbeatable price point.



The UFORCE U10 Pro and U10 XL Pro are built to scale—American scale. Featuring high-end refinement and the power of a new triple-cylinder engine, these workhorses come with robust interiors, a full sound system, and an electronically operated, hydraulic tilt bed.



With its powerful 84 HP twin-cylinder engine and brand-new OmniDrive™ CVT, this fast leader boasts high-pressure adjustable gas shocks with piggyback reservoirs along with 12 inches of ground clearance, letting you go where few quads have gone before.









TECHNOLOGY

All new power, precision, and control. A solid Z10 out of 10.

Push the start button on the steering wheel to fire up the all-new turbocharged triple-cylinder engine and prepare for launch. Navigate your experience with the CFMOTO RideSync™ multi-media interface (MMI) with Apple CarPlay, your touchscreen link to connectivity and control. Our redesigned OmniDrive™ CVT delivers seamless transitions so fluid they slip by unfelt. And as for the rough stuff, those FOX QSE shocks, adjusted via steering wheel controls and FOX app integration, level the gnarliest playing fields.





CFMOTO isn't just in the off-road game, we're changing it.

Our brand-new U.S. headquarters in Minneapolis, Minnesota, isn't just a building it's a beacon of state-of-the-art design and innovation, laser-focused on the American rider. We're creating access to the off-road without a hint of compromise. Delivering surprise after surprise with machines that stand out—and stand resilient. Built tough, easy to service, and ready for your unique touches.



Greenbacks Go Further

We're reversing inflation while bringing all-new machines—because we can. If you want to spend more, go right ahead, it's a free country.

Trailblazing Tech

Advanced ride modes, adjustable suspensions, intuitive interfaces, and seamless connectivity. It's everything you need to dominate any terrain with unshakable confidence.

dependable as the folks who call this place home: Built strong, packed with power, and tested to

handle whatever you throw at them.







Doubling down wasn't enough.
We give you the new triple.

You wanted a machine that can take on the gnarliest American terrain with power and confidence, at a competition-crushing price. Enter the ZFORCE Z10 and Z10-4 featuring our brand-new 143 HP triple-cylinder turbocharged engine. Built with you in mind, every element from the push button starter on the supercarinspired steering wheel to the FOX QSE shocks to the redesigned OmniDrive™ CVT, is CFMOTO's answer to your call for the ultimate sport side-by-side. Just wait until you grip the wheel and interact with the crystal clear 12.3" responsive CFMOTO RideSync™ MMI touchscreen. This isn't just control, it's command of the wilds wrapped in the thrill of the ride.

998CC
Turbocharged 998cc
Triple-Cylinder

143 HP @ 7750 RPM **12.3**"
CFMOTO RideSync™
MMI Display

4^{II}

USA

Z10/Z10-4 Standard Features

- Electronic Power Steering with 4 Modes (Auto/Low/Mid/High)
- (2) 4500 lb. Winch with Synthetic Rope
- 3 Electronic Throttle with 3 Ride Modes (Comfort/Trail/Sport)
- 4 12.3" CFMOTO RideSync™ MMI Touchscreen Display with Backup Camera and LCD Display
- ⑤ CFMOTO LED™ Headlights/Taillights/Backup Lights
- 6 Half Doors
- Multi-Function Steering Wheel
- Fox QSE Shocks with 3 Adjustable Suspension Modes (Soft, Medium, Firm)
- (9) HDPE Skid Plate and Aluminum Bash Plate
- NFC Key
- 14" Aluminum Wheels with 30" Tires
- Wide 64" Stance





FOX QSE Shocks with Eibach Springs

11



ZFORCE Sport Standard Features

- 1 Hardtop Roof
- 2 Dual A-Arm Rear Suspension with Adjustable Toe Control Link
- 3 Aluminum Alloy Wheels and Go-Anywhere Tires
- 4 Room for Four (950 Sport 4)
- (5) Electronic Power Steering
- Electronic Throttle with Ride Modes (Normal/Sport)
- LED Headlights/Taillights with Backup Lights
- Powerful Winch with Synthetic Rope (3500 lb. on Sport/4500 lb. on Sport 4)
- Wide 60" Sport Stance
- Protective Half Side Doors
- (III) Adjustable Gas Shocks
- Rear Cargo Box Cover



Aluminum Alloy Wheels with Beadlock Rims (Sport 4)



ZFORCE Trail Standard Features


- 1 Hardtop Roof
- 2 Dual A-Arm Rear Suspension with Adjustable Toe Control Link
- (3) Aluminum Alloy Wheels
- 4 Adjustable Gas Shocks (950 Trail)
- 5) Electronic Power Steering
- Electronic Throttle with Ride Modes (Normal/Sport)
- LED Headlights/Taillights with Backup Lights
- 3500 lb. Winch
- 9 50" Trail Stance
- Protective Half Side Doors
- LCD Display





Z10


143 HP 998cc Inline
Triple-Cylinder Turbocharged 64" Wide





950 SPORT

83 HP 963cc V-Twin EFI **60"Wide**





950 TRAIL

83 HP 963cc V-Twin EFI **50"Wide**



800 TRAIL

58 HP 800cc V-Twin EFI **50"Wide**

ZFORCE FEATURES

	800 TRAIL	950 TRAIL	950 SPORT	950 SPORT 4	Z10	Z10-4
Electronic Power Steering						
Adjustable EPS Modes (Auto/Low/Mid/High)	-	-	-	-	•	
3500 lb. Winch	•	•	•	-	-	-
4500 lb. Winch with Synthetic Rope	_	-	_	•	•	
lectronic Throttle with Normal/Sport Modes					-	-
ctronic Throttle with Comfort/Trail/Sport Modes	_	_	_	-	•	
LCD Display	•		•	•	•	•
12.3" CFMOTO RideSync™ MMI Touchscreen with Backup Camera	-	-	-	-	•	•
T-Box				•		
CFMOTO RideSync App Compatible	•	•	•	•	•	•
12V Outlet and USB Port	•	•	•		•	•
D Headlights/Taillights with Backup Lights					-	-
CFMOTO LED™ Headlights/Taillights with Backup Lights	_	-	-	_	•	•
Roof			•		0	0
Fender Flares		•			_	-
Tilt Steering	•	•	•		•	•
Adjustable Driver's Seat					•	
Adjustable Passenger's Seat	_	-	-	-	-	
Half Doors	•	•	•	•	•	•
Rear Cargo Box Cover	0	0	•		_	-
2" Receiver	•		•	•	_	_
Multi-function Steering Wheel	_	_	-	_	•	•
FOX® QSE Shocks with 3 Adjustable Suspension Modes (Soft/Medium/Firm)	-	-	-	-	•	•
HDPE Skid Plate						
Aluminum Bash Plate	-	-	-	_	•	
Front Bumper					•	
NFC Key	-	-	-	_	•	•
Bus Bar						
Front & Rear Recovery Hooks	-	-	-	_	•	•
Front & Rear Swaybars						
			Cı I	1 0 4		

Standard Accessory

ZFORCE SPECIFICATIONS

	800 TRAIL	950 TRAIL	950 SPORT	950 SPORT 4	Z10	Z10-4
Engine Type	V-Twin, liquid-cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid-cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid-cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid-cooled, 4-stroke, SOHC, 8-valve	3 cylinder, 4-stroke, liquid-cooled, DOHC, Turbo	3 cylinder, 4-stroke, liquid-cooled, DOHC, Turb
Displacement	800cc	963cc	963cc	963cc	998cc	998cc
Max Power	58 HP @ 7500 RPM	83 HP @ 7500 RPM	83 HP @ 7500 RPM	83 HP @ 7500 RPM	143 HP @ 7750 RPM	143 HP @ 7750 RPM
Max Torque	50 LB-FT @ 5750 RPM	63 LB-FT @ 5000 RPM	63 LB-FT @ 5000 RPM	63 LB-FT @ 5000 RPM	100 LB-FT @ 7000 RPM	100 LB-FT @ 7000 RPM
Fuel System	Bosch® EFI	Bosch® EFI	Bosch® EFI	Bosch® EFI	Bosch® EFI	Bosch® EFI
Drive	2WD/4WD/4WD lock	2WD/4WD/4WD lock	2WD/4WD/4WD lock	2WD/4WD/4WD lock	2WD/4WD/4WD lock	2WD/4WD/4WD lock
Transmission	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	OmniDrive™ CVT P/R/N/H/L	OmniDrive™ CVT P/R/N/H
LxWxH	121" x 50" x 72"	121" x 50" x 72"	121" x 60" x 74"	151" x 60" x 74"	129" x 64" x 68.5"	159" x 64" x 68.5"
Wheelbase	90"	90"	90"	120"	99"	129"
Dry Weight	1290 lbs.	1314 lbs.	1436 lbs.	1700 lbs.	1863 lbs.	2105 lbs.
Ground Clearance	10"	10"	12"	12"	14"	14"
Fuel Tank Capacity	9.8 gal.	9.8 gal.	9.8 gal.	9.8 gal.	9.9 gal.	9.9 gal.
Suspension	Front: Dual arched A-arms/ Rear: Dual A-arms with adjustable Toe Control Link	Front: Dual arched A-arms/ Rear: Dual A-arms with adjustable Toe Control Link	Front: Dual arched A-arms/ Rear: Dual A-arms with adjustable Toe Control Link	Front: Dual arched A-arms/ Rear: Dual A-arms with adjustable Toe Control Link	Front: High clearance A-arm, independent/Rear: Quadlink™ Gen II trailing arm independent	Front: High clearance A-arm, independent/Rear Quadlink™ Gen II trailing o independent
Wheels	Front/Rear: 14" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy with beadlocks	Front/Rear: 14" Aluminum Wheels	Front/Rear: 14" Aluminum Wheels
Tires	Front: 26" x 8" x R14 Rear: 26" x 9" x R14	Front: 26" x 8" x R14 Rear: 26" x 9" x R14	Front: 27" x 9" x R14 CST Stag Rear: 27" x 11" x R14 CST Stag	Front: 27" x 9" x R14 CST Stag Rear: 27" x 11" x R14 CST Stag	Front & Rear: 30" X 10" X 14" CST Pulse XT	Front & Rear: 30" X 10" X 14 CST Pulse XT
Shocks	Front/Rear: Spring preload adjustable, oil damped	Front/Rear: High pressure gas w/piggyback reservoir, 3-position compression adjustable	Front/Rear: High pressure gas w/piggyback reservoir, 3-position compression adjustable	Front/Rear: High pressure gas w/piggyback reservoir, 7-position compression adjustable	FOX adjustable piggyback reservoir (2.5") gas shock with CAB controlled compression switch	FOX adjustable piggyback reservoir (2.5") gas shock w CAB controlled compressic switch
Brakes	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc	Front/Rear: Hydraulic disc
Wheel Travel	Front: 10"/Rear: 12"	Front: 10"/Rear: 12"	Front: 12.1"/Rear: 13.1"	Front: 12.1"/Rear: 13.1"	Front: 17"/Rear: 20"	Front: 17"/Rear: 20"
Winch	3500 lbs.	3500 lbs.	3500 lbs.	4500 lbs.	4500 lbs.	4500 lbs.
Colors	Nebula Black	Nebula Black, Magma Red	Nebula Black, Magma Red, Twilight Blue	Nebula Black, Magma Red, Twilight Blue	Nebula Black, Lava Orange	Nebula Black, Lava Orang







You asked for a utility vehicle that's as versatile as you are.

Long days are about to get more productive—and enjoyable. The smooth, quiet power of the 88 HP engine and brand new OmniDrive™ CVT is a utility vehicle game-changer. Flip between 'Normal' and 'Work' drive modes as easily as you switch from adventurer to doer. Enjoy the comfort of the plush 3-person bench seat (6-person capacity on the U10 XL Pro). The 1000-lb. capacity electronic/ hydraulic tilting cargo box makes hauling and unloading effortless. The NFC key, standard audio system, tilt steering, and a crystal-clear 8" CFMOTO RideSync™ MMI touchscreen make this vehicle the ultimate utility companion.

998cc Triple-Cylinder

88_{HP} @ 7250 RPM @ 6500 RPM

70 LB-FT

2500 LBS. **Towing Capacity**

1000 LBS. Electronic/Hydraulic Tilting Cargo Box

U10 Pro/U10 XL Pro **Standard Features**

- 1 Hardtop Roof
- (2) Electronic Power Steering
- 3 Ride Modes (Work/Normal)
- 4 8" CFMOTO RideSync™ MMI Touchscreen Display
- Side Mirrors
- CFMOTO LED™ Headlights/Taillights/Backup Lights
- 7 4500 lb. Winch with Synthetic Rope
- (8) 14" Aluminum Alloy Wheels with 29"Tires
- Audio Package
- (10) 3-Person Bench Seat (6-Person Capacity on U10 XL Pro)
- (11) Side Nets
- 1000-lb. Capacity Electronic/ Hydraulic Tilting Cargo Box









UFORCE 1000/1000 XL Standard Features

- (1) Hardtop Roof
- Electronic Power Steering with Tilt Steering Wheel
- 3 Ride Modes (Work/Normal)
- 4 TFT Display
- Side Mirrors
- 6 LED Headlights and Taillights with Backup Lights
- Powerful Winch with Synthetic Rope (3500 lb. on 1000/4500 lb. on 1000 XL)
- 8 Aluminum Alloy Wheels with 27" CST Performance Tires
- Side Nets
- 3-Person Bench Seat (6-Person Capacity on 1000 XL)
- (11) 12-Volt Outlet and USB Port
- 1000-lb. Capacity Tilting Cargo Box

3-Person Bench Seat(s) with Under-Seat Storage





UFORCE 600/800 XL Standard Features

- 1 Hardtop Roof
- 2 Electronic Power Steering with Tilt Steering Wheel
- 3 Ride Modes (Work/Normal)
- 4 LCD Display
- Side Mirrors
- LED Headlights and Taillights with Backup Lights
- Powerful Winch (3500 lb. with Steel Rope on 600/ 4500 lb. with Synthetic Rope on 800 XL)
- 8 Aluminum Alloy Wheels
- Side Nets
- (iii) 12-Volt Outlet and USB Port
- High-Capacity Dumping Cargo Box (600-lb. capacity on 600 660-lb. capacity on 800 XL)
- 2" Receiver

2-Person Bench Seat(s) vith Under-Seat Storage



ectronic Powe Steering wit Tilt Whe





U10 PRO

88 HP 998cc Inline Triple EFI



1000 XL

71 HP 963cc 8-valve V-Twin EFI



1000

71 HP 963cc 8-valve V-Twin EFI



800 XL

63 HP 800cc 8-valve V-Twin EFI



600

36 HP 580cc 4-valve Single Cylinder EFI

UFORCE FEATURES

	600	800 XL	1000	1000 XL	U10 PRO	U10 XL PRO
Electronic Power Steering						
Bosch® Electronic Throttle with Work/Normal Modes						
3500 lb. Winch	•	_	•	_	_	_
4500 lb. Winch with Synthetic Rope	_		-			
2-Person Bench Seat(s)	•		-	_	-	_
3-Person Bench Seat(s)	_	_				
LED Headlights/Taillights with Backup Lights					-	-
CFMOTO LED™ Headlights/Taillights/Backup Lights	_	_	-	_	•	•
Tilt Steering Wheel					•	
5" LCD Display			-	_	_	-
5" TFT Display	_	-			-	-
8" CFMOTO RideSync™ MMI Touchscreen Display	_	_	-	_	•	•
T-Box						
CFMOTO RideSync App Compatible						
12V Outlet and USB Port	•	•	•	•	•	
Push-Button Shifting	_	_	-	_	•	
NFC Key	_	_	-	_	•	•
2" Receiver						
Mirrors	•	•	•	•	•	•
Side Nets						
Roof	•	•	•	•	•	•
Locking Rear Differential	•				•	
Large Adjustable Driver's Seat						
Large Adjustable Passenger's Seat	_		-	_	•	•
Under-seat Storage					-	_
Removable Storage Box	_	_			-	_
Front Bumper	•	•	•	•	_	_
Electronic/Hydraulic Tilt Bed	_	_	-	_	•	
Skid Plate	•	•	•	•	•	•
Front Sway Bar	_	_	-	_		
Rear Sway Bar						
Hill Descent Control	_	_	_	_	•	•
Buss Bar	0	0	0	0		
Audio Package	0	0	0	0	•	
			Standard	Acces	sory	

UFORCESPECIFICATIONS

	600	800 XL	1000	1000 XL	U10 PRO	U10 XL PRO
Engine Type	Single cylinder, liquid cooled, 4-stroke, SOHC, 4-valve	V-Twin, liquid cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid cooled, 4-stroke, SOHC, 8-valve	3 cylinder,4-stroke, liquid- cooled, DOHC	3 cylinder,4-stroke, liquid- cooled, DOHC
Displacement	580cc	800cc	963cc	963cc	998cc	998cc
Max Power	36 HP @ 6250 RPM	63 HP @ 7000 RPM	71 HP @ 7000 RPM	71 HP @ 7000 RPM	88 HP @ 7250 RPM	88 HP @ 7250 RPM
Max Torque	33 LB-FT @ 4750 RPM	51 LB-FT @ 5500 RPM	54 LB-FT @ 6500 RPM	54 LB-FT @ 6500 RPM	69 LB-FT @ 6500 RPM	69 LB-FT @ 6500 RPM
Fuel System	Bosch® EFI					
Drive	2WD/4WD/4WD lock					
Transmission	CVTech® Automatic P/R/N/H/L	$OmniDrive^{^{TM}}CVTP/R/N/H/L$	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	$OmniDrive^{^{TM}}CVTP/R/N/H/L$	$OmniDrive^{^{TM}}CVTP/R/N/H/L$
LxWxH	111" x 57" x 76"	143" x 60" x 79"	116" x 63.5" x 73"	148" x 63.5" x 73"	117" x 64" x 77"	148" x 64" x 77"
Wheelbase	76"	109.1"	80.7"	112"	81.1"	112.5"
Dry Weight	1345 lbs.	1629 lbs.	1537 lbs.	1853 lbs.	1742 lbs.	2061 lbs.
Ground Clearance	10.5"	11.8"	11.4"	12"	13"	13"
Fuel Tank Capacity	9.25 gal.	10.5 gal.	10.6 gal.	10.6 gal.	11.8 gal.	11.8 gal.
Cargo Capacity	600 lbs.	660 lbs.	1000 lbs.	1000 lbs.	1000 lbs.	1000 lbs.
Turning Radius	14.9'	18'	13.4'	18'	13.9'	17.7'
Suspension	Front: High clearance A-arm independent Rear: Double A-arm independent					
Wheels	Front/Rear: 12" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy				
Tires	Front: 26" x 8" x R12 Rear: 26" x 10" X R12	Front: 27" x 9" x 14" Rear: 27" x 11" x 14"	Front: 27" x 9" x R14 CST Rear: 27" x 11" x R14 CST	Front: 27" x 9" x R14 CST Rear: 27" x 11" x R14 CST	Front: 29" x 9" x R14 CST Rear: 29" x 11" x R14	Front: 29" x 9" x R14 CST Rear: 29" x 11" x R14
Shocks	Front/Rear: Spring preload adjustable, oil damped					
Brakes	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with electronic parking brake	Front/Rear: Hydraulic disc with electronic parking brake			
Wheel Travel	Front: 7.9"/Rear: 8.3"	Front: 8.9"/Rear: 8.9"	Front: 9"/Rear: 9"	Front: 9"/Rear: 9"	Front: 11"/Rear: 10.4"	Front: 11"/Rear: 10.4"
Towing Capacity	1500 lbs.	1500 lbs.	2500 lbs.	2500 lbs.	2500 lbs.	2500 lbs.
Colors	Nebula Black, TrueTimber® Camo	Nebula Black, Twilight Blue, TrueTimber® Camo	Nebula Black, Twilight Blue, TrueTimber® Camo	Nebula Black, Twilight Blue, TrueTimber® Camo	Nebula Black, Bordeaux Red, TrueTimber® Camo	Nebula Black, Bordeaux Red, TrueTimber® Camo







When this beast hits the trail, others play dead.

You're not looking for average, are you? This beast packs a 963cc V-Twin engine and a revolutionary suspension to chew up any terrain. Need to keep tabs on everything? The advanced 7" TFT display has got your back with all the diagnostics and entertainment you could want. This is your new partner in adventure, featuring Adjustable Electronic Power Steering, three ride modes (Work/Normal/Sport), and Downhill Assist Control. Heavy-duty steel bumpers and an aluminum bash plate declare, "bring it on." And two removable hard side travel cases declare, "bring it all."

963cc V-Twin Engine **84**HP @ 7500 RPM

62 LB-FT @ 5500 RPM

Wheel Travel

1800 LBS.
Towing Capacity

CFORCE 1000 Overland Standard Features

- Adjustable Electronic Power Steering with 4 Modes (Auto/Min/Mid/Max)
- Ride Modes (Work/Sport/Normal)
- (3) Windshield and Hand Guards
- ← CFMOTO LED™ Headlights & Taillights with Daytime Running Lights

 A property of the prop
- (5) LED Floodlights
- **6** Large Bumpers
- 7 3500 lb. Winch with Synthetic Rope
- 8 Aluminum Bash Plate and HDPE Skid Plate
- © Cast Aluminum Wheels with Beadlock Rims and 27" Clincher Tires
- Fender Flares
- 1 2 Removable Hard Side Travel Cases
- Downhill Assist Control





Removable Hard Side Travel Cases



CFORCE 1000 Touring/ 800 Touring Standard Features

- Adjustable Electronic Power Steering with 4 Modes (Auto/Min/Mid/Max)
- Ride Modes (Work/Sport/Normal)
- (3) Hand Guards
- Front and Rear Composite-Over-Steel Racks
- S CFMOTO LED™ Headlights & Taillights with Daytime Running Lights
- Heavy-Duty Steel Bumpers
- (7) 3500 lb. Winch with Synthetic Rope
- Aluminum Bash Plate and HDPE Skid Plate
- Cast Aluminum Wheels
- (10) Fender Flares
- (11) Sculpted 2-Up Seating
- Downhill Assist Control

Fully-Adjustable Gas Shock Suspension (1000



7"TFT Display



CFORCE 600/600 Touring Standard Features

- Electronic Power Steering
- 2 Bosch® Electronic Throttle with Work/Normal Modes
- Hand Guards
- 4 Front and Rear Composite-Over-Steel Racks
- Sidevision™ LED Headlights and Taillights with Backup Lights
- 6 3500 lb. Winch with Synthetic Rope
- Aluminum Alloy Wheels
- Sculpted 2-up Seating (600 Touring)
- LCD Display with Bluetooth Call Indicator
- 12V Outlet and USB Port
- 1 2" Receiver







CFORCE 500 Standard Features

- 1 Electronic Power Steering
- Aluminum Alloy Wheels
- (3) 2500 lb. Winch
- 4 Ridevision™ LED Headlights and Taillights with Backup Lights
- 5 Front and Rear Composite-Over-Steel Racks
- 6 LCD Display
- USB Port
- 8 2" Receiver








CFORCE 400 Standard Features

- 1 Front and Rear Bumper
- 2 Halogen Headlights with LED Accents
- 3 Steel Racks
- 4 LCD Display
- (5) USB Port
- 6 2" Receiver

"Receiver









800 TOURING

70 HP 800cc 8-valve V-Twin EFI



600 TOURING

44 HP 580cc 4-valve Single Cylinder EFI



600

44 HP 580cc 4-valve Single Cylinder EFI



500

34 HP 500cc 4-valve Single Cylinder EFI



400


30 HP 400cc 4-valve Single Cylinder EFI

CFORCE FEATURES

	400	500		600	800	1000	1000
FL D C	400	500	600	TOURING	TOURING	IOURING	OVERLAND
Electronic Power Steering	_				_	_	_
Adjustable Electronic Power Steering	_	_	_	_			
Bosch® Electronic Throttle with Work/Normal Modes	-	-	•	•	-	-	-
Bosch® EFI with Work/Normal/Sport Modes	-	-	-	-	•	•	•
2500 lb. Winch with Steel Cable	0		-	-	_	-	_
3500 lb. Winch with Synthetic Rope	-	-					
Halogen Headlights with LED Accents, LED Taillights with Backup Lights	•	-	_	-	-	_	-
Ridevision™ LED Headlights and Taillights with Backup Lights	-	•	•	•	-	-	-
CFMOTO LED™ Headlights & Taillights with Daytime Running Lights	-	-	-	-	•	•	•
LED Floodlights	-	-	-	_	-	-	
Steel Racks		_	_	_	_	_	_
Steel Racks with Composite Cover	-						
LCD Display					-	-	-
7" TFT Display	-	-	-	-		•	
Bluetooth Call Indicator	-	-	•	•	•		
Passenger Seat	-	-	-	•		•	-
2" Receiver	•	•	•	•		•	
Hand Guards	0	0	•			•	
Windshield	0	0	0	0	0	0	
Fender Flares	-	-	-	-		•	
Front Bumpers							
Aluminum Bash Plate and HDPE Skid Plates	-	-	-	_	-	-	•
12V Outlet and USB Port							
Engine Braking			•		-	-	-
Downhill Assist Control	-	-	_	-		•	
			Stan	Standard Accessory			

CFORCE SPECIFICATIONS

	400	500	600	600 TOURING	800 TOURING	1000 TOURING	1000 OVERLAND
Engine Type	Single cylinder, liquid cooled, 4-stroke, SOHC, 4-valve	V-Twin, liquid cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid cooled, 4-stroke, SOHC, 8-valve	V-Twin, liquid cooled, 4-stroke, SOHC, 8-valve			
Displacement	400cc	500cc	580cc	580cc	800cc	963cc	963cc
Max Power	30 HP @ 7200 RPM	34 HP @ 6800 RPM	44 HP @ 6500 RPM	44 HP @ 6500 RPM	70 HP @ 7500 RPM	84 HP @ 7500 RPM	84 HP @ 7500 RPM
Max Torque	22 LB-FT @ 6000 RPM	29 LB-FT @ 6000 RPM	37 LB-FT @ 6000 RPM	37 LB-FT @ 6000 RPM	51 LB-FT @ 5500 RPM	62 LB-FT @ 5500 RPM	62 LB-FT @ 5500 RPM
Fuel System	EFI	EFI	EFI	EFI	EFI	EFI	EFI
Drive	2WD/4WD/4WD lock	2WD/4WD/4WD lock	2WD/4WD/4WD lock				
Transmission	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	CVTech® Automatic P/R/N/H/L	OmniDrive™ CVT P/R/N/H/L	OmniDrive™ CVT P/R/N/H/L	OmniDrive™ CVT P/R/N/H/L
LxWxH	80" x 44" x 45"	80" x 44" x 45"	80" x 46.5" x 48"	88" x 46.5" x 55"	92" x 50" x 57.1"	92" x 50" x 57.7"	92" x 50" x 53"
Wheelbase	50"	50"	50.5"	58.5"	58"	58"	58"
Dry Weight	730 lbs.	713 lbs.	753 lbs.	863 lbs.	960 lbs.	975 lbs.	975 lbs.
Ground Clearance	9.8"	10.3"	10.6"	10.6"	11.4"	12"	12"
Fuel Capacity	4.5 gal.	4.5 gal.	4.75 gal.	4.75 gal.	6.9 gal.	6.9 gal.	6.9 gal.
Rack Capacity	Front: 75 lbs./Rear: 132 lbs.	Front: 75 lbs./Rear: 132 lbs.	Front: 75 lbs./Rear: 100 lbs.	Front: 100 lbs./Rear: 75 lbs.	Front: 99 lbs./Rear: 198 lbs.	Front: 99 lbs./Rear: 198 lbs.	Front: 99 lbs./Rear: 198 lbs.
Seat Height	20"	20"	21"	21"	22"	22"	22"
Suspension	Front/Rear: Double A-arm independent	Front: High clearance A-arm, independent/Rear: Trailing arm independent	Front: High clearance A-arm, independent/Rear: Trailing arm independent	Front: High clearance A-arm, independent/Rear: Trailing arm independent			
Wheels	Front/Rear: 12" Steel	Front/Rear: 12" Cast aluminum alloy	Front/Rear: 12" Cast aluminum alloy	Front/Rear: 12" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy	Front/Rear: 14" Cast aluminum alloy w/bead lock
Tires	Front: 24" x 8" x R12 Rear: 24" x 10" x R12	Front: 25" x 8" x R12 Rear: 25" x 10" x R12	Front: 26" x 8" x R12 Rear: 26" x 10" x R12	Front: 26" x 8" x R12 Rear: 26" x 10" x R12	Front: 26" x 8" x R14 Rear: 26" x 10" x R14	Front: 27" x 9" x R14 Rear: 27" x 11" x R14	Front: 27" x 9" x R14 CST Clincher /Rear: 27" x 11" x R14 CST Clincher
Shocks	Front/Rear: Spring preload adjustable, oil damped	Front/Rear: High pressure gas w/piggyback reservoir, compression and rebound adjustable	Front/Rear: High pressure gas w/piggyback reservoir, compression and rebound adjustable				
Brakes	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake	Front/Rear: Hydraulic disc with parking brake
Wheel Travel	Front: 7.5"/Rear: 8.9"	Front: 7.5"/Rear: 8.9"	Front: 6.3"/Rear: 8.3"	Front: 6.3"/Rear: 8.3"	Front: 9"/Rear: 9"	Front: 9"/Rear: 9"	Front: 9"/Rear: 9"
Towing Capacity	1350 lbs.	1350 lbs.	1500 lbs.	1500 lbs.	1800 lbs.	1800 lbs.	1800 lbs.
Colors	Jet Black (injected), Hunter Green (injected)	Pearl White, Magma Red, TrueTimber® Camo	Nebula Black, Twilight Blue, TrueTimber® Camo	Nebula Black, Twilight Blue, TrueTimber® Camo	Lava Orange, Tundra Grey, TrueTimber® Camo	Zircon Black, Tundra Grey, TrueTimber® Camo	Desert Tan, Forest Green

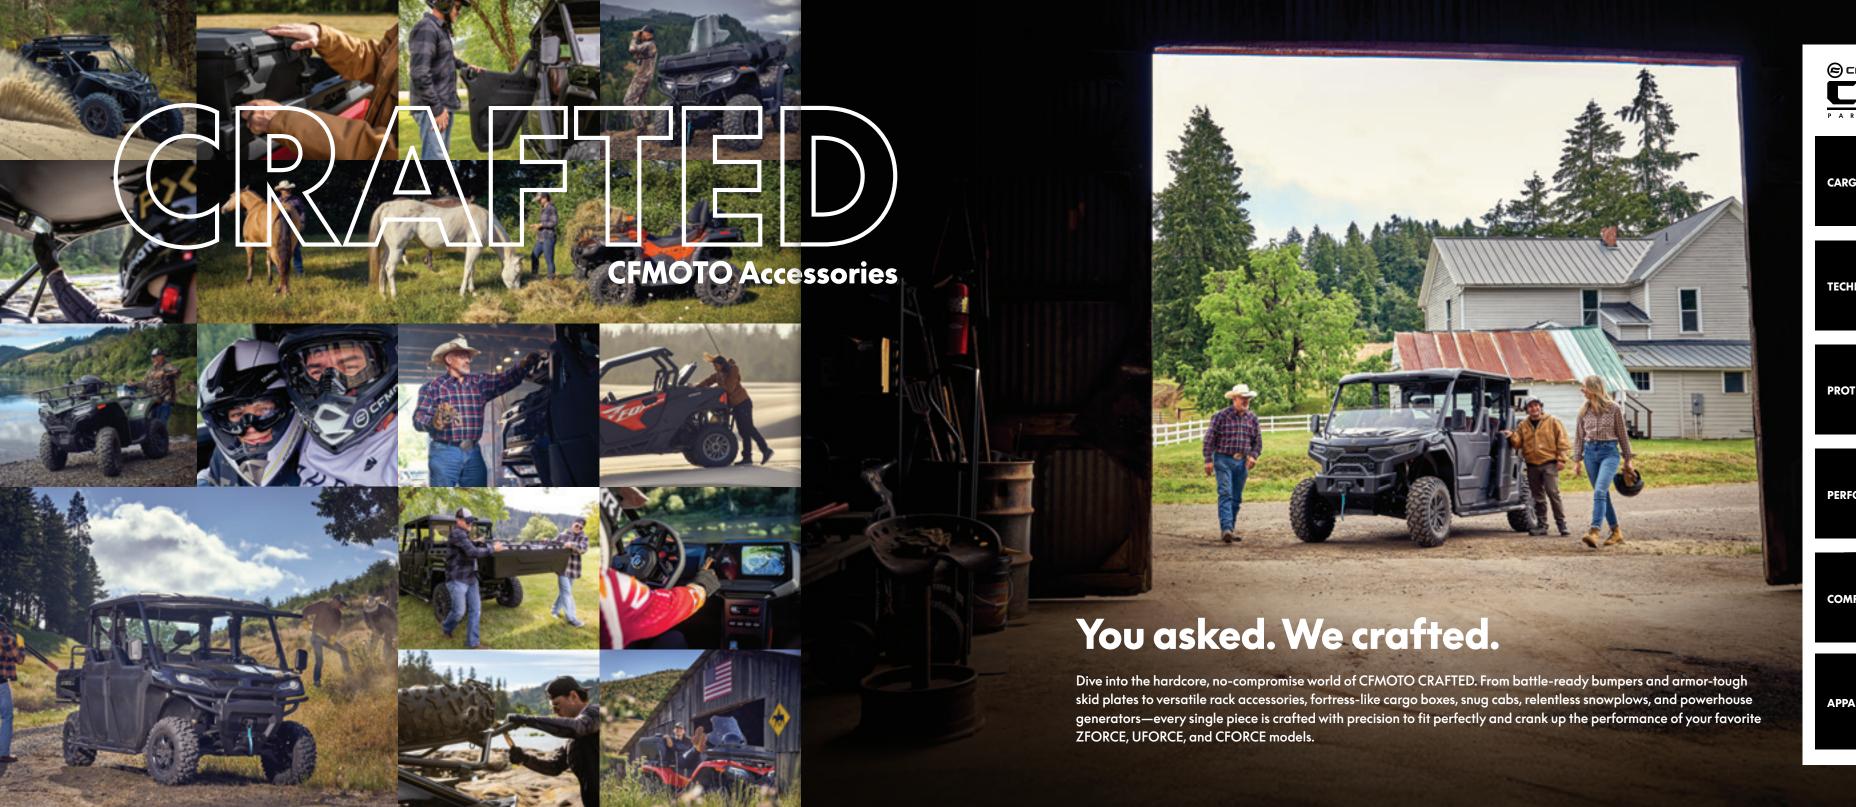



RGO

ECHNOLOGY

PROTECTION

ERFORMANCE

COMFORT

PPAREL



Copyright 2025 Zhejiang CFMOTO Power Co., Ltd. All rights reserved. CFMOTO®, CFORCE®, UFORCE® and CFMOTO CF logo are trademarks of Zhejiang CFMOTO Power Co., Ltd. BOSCH® is a registered trademark of Robert Bosch GmbH. Delphi® is a registered trademark of Delphi automotive PLC. CYTech® is a registered trademark of CYTech—AAB. All ZFORCE, CFORCE and UFORCE models feature a standard 12-month Limited Warranty. WARNING: CFMOTO recreational vehicles are intended for off-road use only and can be hazardous to operate. Read Owner's Manual and all product labels before operating. Never operate on paved roads. Operators and passengers must wear a helmet, eye protection and protective clothing. Operators must be at least 16 years old with a valid driver's license. Passengers, if permitted, must be at least 12 years old. Always use seat belts, cab netting and doors (if equipped). Never operate under the influence of alcohol or drugs. Avoid excessive speed and sharp turns, and never engage in stunt driving. Check state and local laws before operating on trails. Take a safety training course before operating. Contact your CFMOTO dealer for more information, call the ATV Safety Institute at 1-800-887-2887, or go to www.atvsafety.org. ©2025 Zhejiang CFMOTO Power Co., Ltd.